


**SINGLE NEEDLE TWO THREAD OVEREDGING MACHINE FOR ABUTTED JOINING OF ARTIFICIAL LAWN CARPETS**

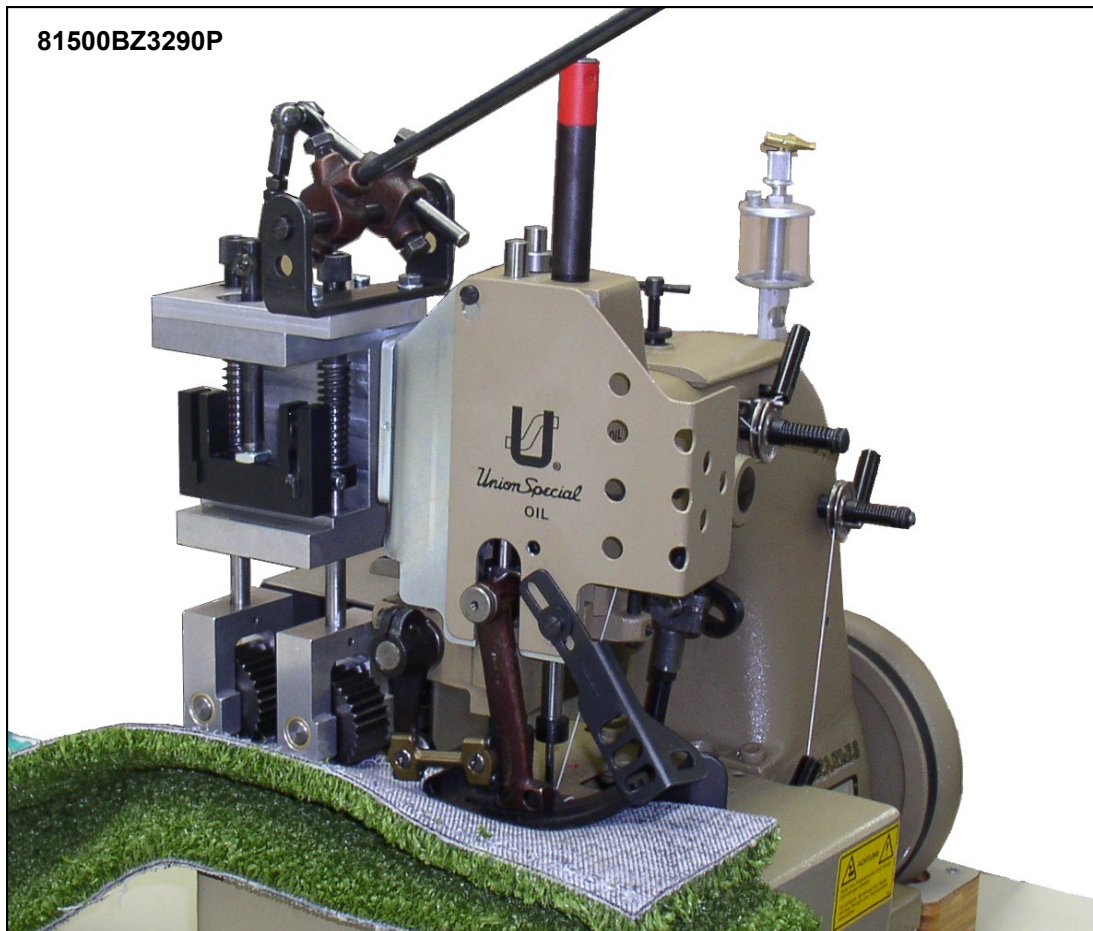

**81500BZ3290:**

Single needle two thread overedging machine with high needle stroke (71 mm) and with lower and upper feed.

For joining artificial lawn carpets with thick PU coating.

Sewing capacity with two layers of material under presser foot from minimum 15 to maximum 22 mm. Loading capacity 30 mm. After sewing the material will be unfolded for abutted seams.

Max. Speed: 1000 stitches / min. (depending on sewing operation)


Threads: 2  
 Width of Seam: 10 – 12 mm, unfolded 20 – 24 mm  
 Stitch Range: 6 – 13 mm  
 Seam Specification: 502 SSa-1

**81500BZ3290P:**

Same as 81500BZ3290 but with two upper and one lower puller rollers, mechanically driven.

**Optional:**

**90709BZA134**, moveable carrier with sewing machine drive, 230 V, 50 Hz, 1 Ph, protection class (IP55)



**502 SSa-1**



Subject to change without notice.

● EFFICIENT

● RELIABLE

● STURDY